
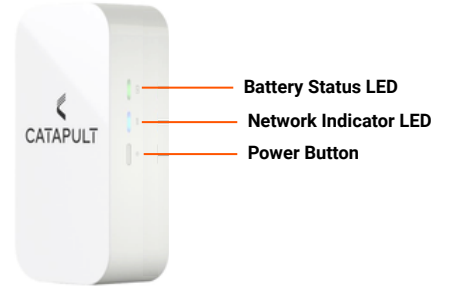



# VECTOR 8 HARDWARE LED QUICK REFERENCE

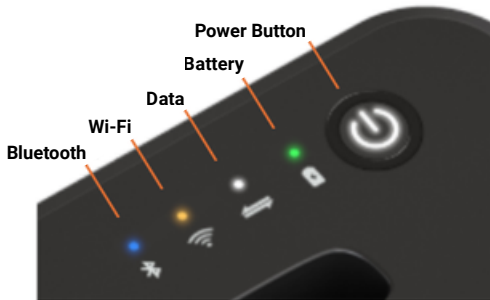

## VECTOR 8 DOCK

### POWER

- Solid → ON (full functionality)
- Breathing → Standby (charging only, no data transfer)
- Off → Powered off

### BATTERY

~180min runtime  
~180min charge

- Flashing → <10% (~15 min)
- Solid → 10-30%
- Solid → 30-80%
- Solid → >80%
- Breathing (plugged in) → Charging
- Solid (plugged in) → Fully charged

### DATA

- Solid → USB-C connected to PC

### WI-FI

- Breathing → Connecting
- Solid → Connected

### BLUETOOTH

- Breathing → Searching
- Solid → Connected

## VECTOR S8 DEVICE

### TOP LED - BATTERY

~6hrs runtime  
~180min charge

- Flashing → <10% (~30 min\*)
- Solid → 10-30%
- Solid → 30-80%
- Solid → >80%

\*Runtime varies by usage

### NORTH LED - GPS

- Flashing → Searching
- Solid → Connected

### SOUTH LED - RECEIVER

- Flashing → Searching
- Solid → Connected

### WHEN DOCKED

- Top LED**
- Breathing → Charging
- Solid → Fully charged
- North LED**
- Breathing → Data ready
- Solid → Transfer complete
- South LED** → Off

## VECTOR RECEIVER

### BATTERY

~6hrs runtime  
~4hrs charge

- Solid → <10% (~45-50 min)
- Solid → Charged

### NETWORK

- Flashing → Ready
- Solid → Live streaming