
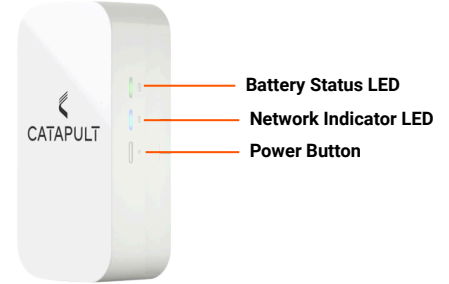



VECTOR 8 HARDWARE LED QUICK REFERENCE

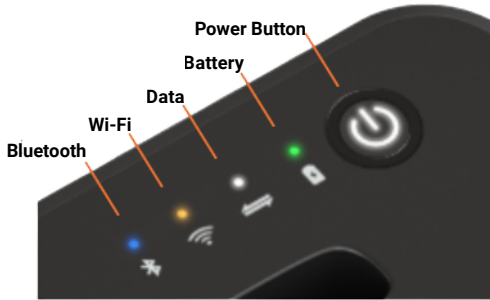

VECTOR 8 DOCK

POWER

- Solid → ON (full functionality)
- Breathing → Standby (charging only, no data transfer)
- Off → Powered off

BATTERY

~180min runtime | ~180min charge

- Flashing → <10% (~15 min)
- Solid → 10–30%
- Solid → 30–80%
- Solid → >80%
- Breathing (plugged in) → Charging
- Solid (plugged in) → Fully charged

DATA

- Solid → USB-C connected to PC

WI-FI

- Breathing → Connecting
- Solid → Connected

BLUETOOTH

- Breathing → Searching
- Solid → Connected

VECTOR S8 DEVICE

CONNECTIVITY

NORTH LED - GPS

- Flashing → Searching
- Solid → Connected

SOUTH LED - RECEIVER

- Flashing → Searching
- Solid → Connected

BATTERY

BOTH LEDs

~6hrs runtime | ~180min charge

- Flashing → <10% (~30 min*)
- Solid → 10–30%
- Solid → 30–80%
- Solid → >80%

*Runtime varies by usage

PERIPHERALS

NORTH LED - BLUETOOTH HRM

- Flashing → Searching
- Solid → Connected

SOUTH LED - BLUETOOTH

- Flashing → Searching
- Solid → Connected

WHEN DOCKED

North LED

- Breathing → Charging
- Solid → Fully charged

South LED

- Breathing → Data ready
- Solid → Transfer complete

VECTOR RECEIVER

BATTERY

~6hrs runtime | ~4hrs charge

- Solid → <10% (~45–50 min)
- Solid → Charged

NETWORK

- Flashing → Ready
- Solid → Live streaming